




# LBW-50 with relief line vent sensor mounting

Typical for:  
LBW-50 (pictured here)  
LBW-Watchman  
LBW-420  
Remote Sensor

## Typical Installation

2-inch union required for testing & calibrating

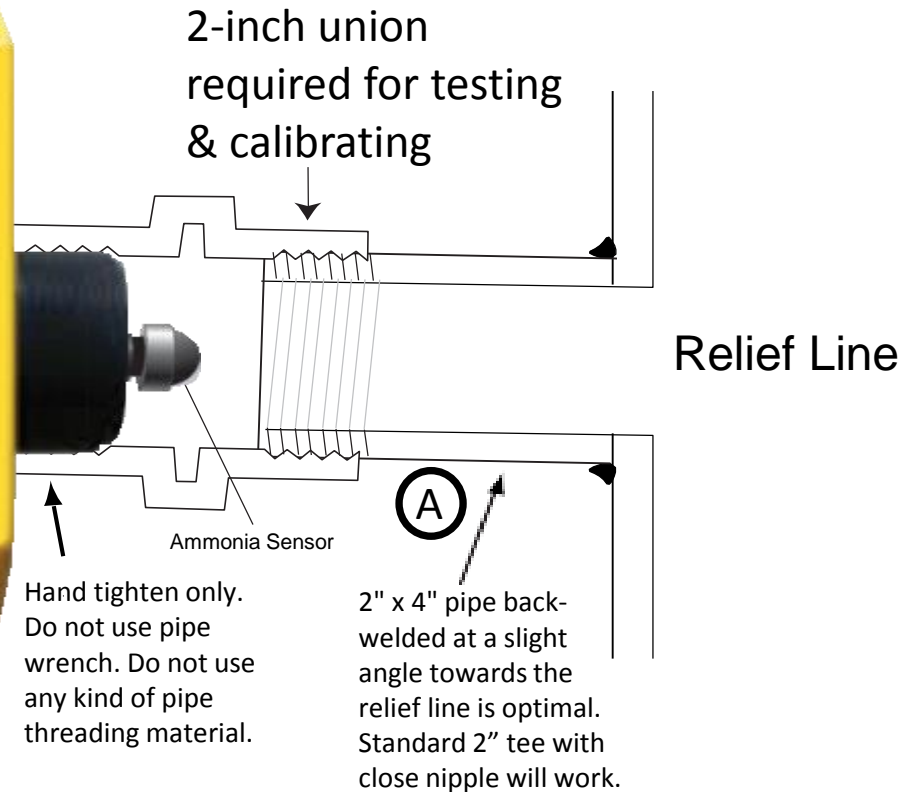

### NOTES:

(A) = If LBW-50-RLV is mounted on the relief line above the roof drill 3/16" hole for condensation drain at this location.  
**DO NOT DRILL THIS HOLE IF MOUNTED INSIDE A BUILDING.**

LBW-50-RLV should be mounted above the roof, above the last relief valve connection, and accessible for testing or calibration.